



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22, 7/38	A1	(11) International Publication Number: WO 98/48581
		(43) International Publication Date: 29 October 1998 (29.10.98)

(21) International Application Number: PCT/FI98/00214

(22) International Filing Date: 11 March 1998 (11.03.98)

(30) Priority Data:
971697 21 April 1997 (21.04.97) FI

(71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LEPPISAARI, Arto [FI/FI]; Teekkarinkatu 7 C 50, FIN-33720 Tampere (FI). HÄMALÄINEN, Jari [FI/FI]; Matti Tapionkatu 1 F 17, FIN-33731 Tampere (FI).

(74) Agent: JOHANSSON, Folke; Nokia Mobile Phones Ltd., P.O. Box 100, FIN-00045 Nokia Group (FI).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BE, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: DE-ALLOCATION AT PHYSICAL CHANNELS IN GENERAL PACKET RADIO SERVICE

(57) Abstract

A method for quickly de-allocating physical channels (PDCH) assigned to packet switched calls in a GPRS supporting GSM digital cellular telephone network. An PDCH de-allocation RLC/MAC control message is broadcast to listening mobile stations from a base station subsystem (BSS) and contains a temporary flow identity (TFI) which is recognised by the listening mobile stations (MS). The mobile stations respond by terminating packet switched data transmissions on the identified PDCHs. The RLC/MAC message also identifies the number of PDCH time slots which can be used before de-allocation must occur.

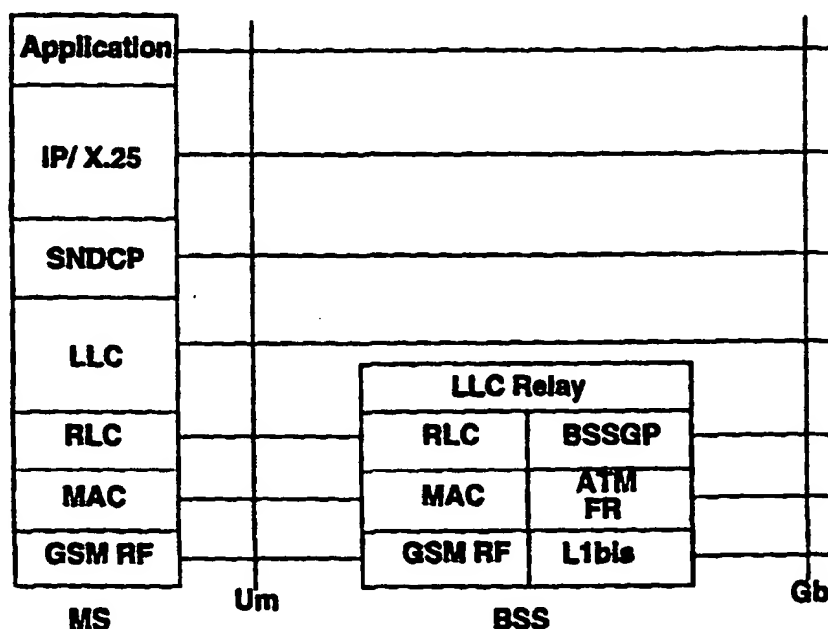

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

DE-ALLOCATION AT PHYSICAL CHANNELS IN GENERAL PACKET RADIO SERVICE

The present invention relates to general packet radio service (GPRS) and more
5 particularly to a method and apparatus for de-allocation of GPRS physical channels.

Current digital cellular telephone systems such as GSM (Global System for Mobile
communications) were designed with an emphasis on voice communications. Data is
normally transmitted between a mobile station (MS) and a base station subsystem (BSS)
10 over the air interface using the so called circuit switched transmission mode where a
physical channel, i.e. a series of regularly spaced time slots on one or more frequencies,
is reserved for the duration of the call. For voice communications, where the stream of
information to be transmitted is relatively continuous, the circuit switched transmission
mode is reasonably efficient. However, during data calls, e.g. facsimile transmissions,
15 internet access, etc, the data stream is 'bursty' and the long term reservation of a physical
channel in the circuit switched mode represents an uneconomic use of the air interface.

Given that the demand for data services with digital cellular telephone systems is
increasing rapidly, a new GSM based service know as the General Packet Radio Service
20 (GPRS) is currently being standardised by the European Telecommunications Standards
Institute (ETSI). GPRS provides for the dynamic allocation of physical channels for data
transmission. That is to say that a physical channel is allocated to a particular MS to BSS
link only when there is data to be transmitted. The unnecessary reservation of physical
channels when there is no data to be transmitted is avoided.

25

GPRS is intended to operate in conjunction with conventional GSM circuit switched
transmission to efficiently use the air interface for both data and voice communications.
GPRS will therefore use the basic channel structure defined for GSM. In GSM, a given
frequency band is divided in the time domain into a succession of frames, known as
30 TDMA (Time Division Multiplexed Access) frames. The length of TDMA frame is
4.615ms. Each TDMA frame is in turn divided into eight consecutive slots of equal
duration. In the conventional circuit switched transmission mode, when a call is initiated,
a physical channel is defined for that call by reserving a given time slot (1 to 8) in each of
a succession of TDMA frames. A series of four consecutive time slots on a physical
35 channel is known as a radio block and represents the shortest transmission unit for

packet switched data on a physical channel. Physical channels are similarly defined for conveying signalling information. With the introduction of GPRS, physical channels will be dynamically assigned for either switched circuit transmission mode or for packet switched transmission mode. When the network requirement for switched circuit transmission mode is high, a large number of physical channels may be reserved for that mode. On the other hand, when demand for GPRS transmission is high, a large number of physical channels may be reserved for that mode. In addition, a high speed packet switched transmission channel may be provided by assigning two or more slots in each of a succession of TDMA frames to a single MS.

There is illustrated in Figure 1 the basic 'architecture' of a GSM cellular network which supports GPRS. The terminology used in Figure 1 is defined, by convention, as follows:

	MS	Mobile Station
15	PC/PDA	Personal Computer/Personal Data Assistant
	BSS	Base Station Subsystem
	BTS	Base Transceiver Station
	BSC	Base Station Controller
	GPRS	General Packet Radio Service
20	HLR	Home Location Register
	SGSN	Serving GPRS Support Node
	GGSN	Gateway GPRS Support Node
	MSC	Mobile Switching Centre
	SS7	Signalling System number 7
25	PSTN	Public-Switched Telephone Network

The full benefits promised by packet switched transmission are only achieved if a data transmission can be set up very quickly, i.e. there is little point in providing for the transmission of short duration packets if the time required to set up each of those transmissions is relatively long. Rapid set-up is achieved in the proposed GPRS system by defining a 'virtual' channel or 'context' between a MS and the SGSN when the MS first becomes active in the cellular network. This virtual channel is not an actual physical channel but involves creating and storing parameters such as the MS identifier, encryption key, etc, at the SGSN and at the MS. When an actual data transmission is initiated between the MS and the SGSN using GPRS, there is no need to generate and/or

transfer this information and the connection can be set up extremely quickly. The proposed GPRS air-interface protocols are set out in the GSM Technical Specification GSM 03.64 (ETSI).

5

Figure 2 shows schematically the radio link protocol stacks which are described in the GSM 03.64 specification. The terminology used in Figure 2 is defined by convention as follows:

	IP	Internet Protocol
10	SNDCP	Subnetwork Dependent Convergence Protocol
	LLC	Logical Link Control
	RLC	Radio Link Control
	MAC	Medium Access Control
	GSM RF	GSM Radio Frequency
15	Um	GPRS/MS interface
	BSSGP	Base Station Subsystem GPRS Protocols
	ATM	Asynchronous Transfer Mode
	FR	Frame Relay
	L1bis	Layer 1 bis
20	SGSN	Serving GPRS Support Node
	BSC	Base Station Controller
	Gb	SGSN/BSC interface

The assignment of physical channels at the radio interface for packet switched transmission is carried out at the RLC/MAC layer by RLC/MAC layer control messages.

25 For example, a MS may initiate a packet transfer by making a 'random access' request using a RLC/MAC message. The number of time slots (or radio blocks) which the MS wishes may be conveyed using a further message. Similarly, the BSS may initiate a packet transfer to the MS using RLC/MAC messages. As already described, when a virtual channel is created between a MS and a SGSN, a MS identifier is assigned to the

30 MS. This identifier is known as a Temporary Logical Link Identifier (TLLI). When a data transmission is initiated between the MS and the BSS and one or more physical channels are allocated, a new RLC/MAC identifier known as a Temporary Flow Identifier (TFI) is assigned to the MS. During the data transmission, RLC/MAC messages will include the TFI in one of their fields to identify the receiving (or transmitting) MS.

35

- It is envisaged that, in a mixed circuit switched/packet switched network, priority will be given to the circuit switched service. This means that if the amount of traffic in the network approaches the network capacity, and a request is made for a circuit switched call, it is necessary to re-allocate physical channels from the packet switched service to the circuit switched service. Re-allocation may be achieved by waiting for ongoing packet switched transmissions to be completed and, upon completion, assigning the released channels to the switched circuit service. However, it is considered more efficient to interrupt ongoing packet switched transmissions on these channels and to immediately allocate the released channels, completing the interrupted transmissions only when the demand for switched circuit transmission has fallen sufficiently (or other non-interrupted packet switched transmissions have been terminated). The existing GPRS proposals require that when capacity is required for switched circuit transmission, RLC/MAC control messages are transmitted to the MSs instructing them to cease transmission on certain specified physical channels and to request access to other physical channels from the BSS. More specifically, a new RLC/MAC control message is defined and which comprises a message identifier field defining the message as a resource reassignment message and a TFI field specifying the MS to receive the message. It is of course necessary to transmit a resource reassignment message separately for each mobile station currently occupying a physical channel which must be de-allocated and the de-allocation process is therefore relatively slow. It is noted that each packet switched transmission generally occupies an uplink and a downlink channel so that two separate RLC/MAC control messages must be sent for each MS.
- It is an object of the present invention to provide a physical channel de-allocation method and apparatus for GPRS which enables the interruption of a packet switched data transmission and the rapid de-allocation of a channel or channels occupied by that transmission.
- According to a first aspect of the present invention there is provided a method of de-allocating one or more physical channels previously assigned for packet switched transmission between a plurality of mobile stations (MS) and a base station subsystem (BSS), the method comprising broadcasting from the BSS an RLC/MAC control message having a message-type field identifying the message as a channel de-allocation message, and a de-allocated channel field identifying the physical channel(s) to be de-allocated,

wherein said control message is received and acted on by said plurality of MSs using said physical channel(s).

5 Preferably, said RLC/MAC control message comprises a field defining the number of time slots or radio blocks after which the identified physical channel(s) must be de-allocated. This number may be zero whereupon the physical channel(s) is (are) de-allocated immediately.

10 Preferably, said RLC/MAC control message contains a field identifying a carrier (i.e. frequency) on which the or each said MS should transmit to the BSS a new packet channel request. More preferably, said RLC/MAC control message contains a PRACH (packet random access channel) allocation field for identifying the time slot(s) where said request should be made on the identified carrier.

15

Preferably, said RLC/MAC control message is transmitted on the same carrier frequency as was used for said de-allocated physical channel(s). This identifies the message to the MSs as relating to channels on said carrier. The de-allocated channel field therefore only needs to identify the de-allocated time slots. More preferably, said RLC/MAC control
20 message contains a field defining the time slot(s) on the identified carrier where the BSS may transmit a downlink resource reassignment message to the MSs and also a field defining the time slot(s) where the BSS may transmit an uplink resource reassignment message. These resource reassignment messages may include a TFI which was assigned to the MSs before deallocation.

25

In one embodiment of the invention, said RLC/MAC control message contains a temporary flow identity field which conveys a temporary flow identity (TFI). This TFI is also stored in a memory of each of said MSs whereby each of the MSs can recognise the RLC/MAC control message as a broadcast message.

30

In an alternative embodiment, the RLC/MAC control message does not require a TFI field. Rather, the message-type field alerts each of the MSs to the fact that the message is a broadcast message to be acted upon by all MSs using the physical channel(s) identified in the de-allocated channel field.

35

According to a second aspect of the present invention there is provided apparatus for de-allocating one or more physical channels previously assigned for packet switched transmission between a plurality of mobile stations (MS) and a base station subsystem (BSS), the apparatus comprising means for broadcasting from the BSS an RLC/MAC control message having a message-type field identifying the message as a channel de-allocation message, and a de-allocated channel field identifying the physical channel(s) to be de-allocated, wherein all of said MSs using said physical channel(s) are arranged to receive and act upon said control message.

10

According to a third aspect of the present invention there is provided a cellular telephone system comprising a BSS incorporating the apparatus of the above second aspect of the present invention and a plurality of MSs arranged to receive said broadcast RLC/MAC control message.

15

For a better understanding of the present invention and in order to show how the same may be carried into effect reference will now be made, by way of example, to the accompanying drawings, in which:

20 Figure 1 shows schematically the architecture of a GSM/GPRS digital cellular telephone network; and

Figure 2 illustrates the protocol layers of a GPRS radio link of the network of Figure 1.

25 The architecture of a GSM network which supports GPRS has already been discussed with reference to Figures 1 and 2. The present invention relates to the transmission protocol used in transmissions between mobile stations (MS) and a base station subsystem (BSS), and more particularly to the transmission protocol at the RLC/MAC layer. The signalling process for allocating physical channels for packet switched transmissions (packet data channels - PDCH) to individual MSs is described in detail in 30 GSM technical specification GSM 03.64 and this will not be discussed further here. Rather, the present invention is concerned with the de-allocation of physical channels previously allocated by the BSS.

When a BSS determines that physical channels previously allocated for packet switched transmissions must be freed for other uses, and in particular for use in switched circuit calls, MSs must be notified of this decision to avoid data being lost. More particularly, the MSs must be informed of the physical channels which are being re-allocated and when this re-allocation must occur. A new RLC/MAC control message is therefore defined.

Each MS in a network is preprogrammed with a special temporary flow identity (TFI) code. This code is the same for all MSs and is used by the MSs to identify a 'broadcast' de-allocation message. All active MSs subsequently 'listen' at the carrier frequency assigned for packet data transmission for RLC/MAC control messages transmitted in the downlink direction and containing the allocated TFI. The new RLC/MAC control message has the following structure where the letter 'M' indicates a mandatory field (in this embodiment) and the letter 'O' indicates an optional field:

No.	Field Name		Bits
1	Message Type	M	8
2	Temporary Flow Identity (broadcast)	M	7
3	De-allocated PDCH	M	8
4	Number of radio blocks before de-allocation	M	4
5	Channel Allocation for uplink channel request	O	4
6	PRACH allocation on defined channel	O	8
7	Time slot to be used for uplink resource re-assignment	O	8
8	Time slot to be used for downlink resource re-assignment	O	8
	Sum of bits		55

The fields of the control message are explained below.

Message Type

This field identifies the control message to the listening MSs as a MAC packet resource de-allocation message.

Temporary Flow Identity (broadcast)

This provides a TFI code and identifies the message as a broadcast message.

De-allocated time PDCH

This field identifies one or more physical channels (PDCH) to be de-allocated. With an 8-bit field, it is possible to de-allocate PDCHs corresponding to all 8 time slots on the associated carrier frequency.

Number of radio blocks before de-allocation

This field defines when the de-allocation must occur. If immediate de-allocation is required, then the number of radio blocks is defined as zero.

Channel Allocation for uplink channel request

This field identifies the carrier (i.e. frequency) on which the MSs should make a request for a new PDCH.

PRACH allocation on defined channel

This field identifies the time slots on the allocated carrier where the PRACH is allocated.

Time slot to be used for uplink resource re-assignment

If the BSS requires to initiate a new packet switched transmission with a MS, the BSS must transmit to the MS both an uplink and a downlink reassignment message on the carrier frequency last used for packet switched transmission between the BSS and that MS. This field identifies the time slot on that carrier where the uplink reassignment message will be transmitted.

Time slot to be used for downlink resource re-assignment

This field identifies the time slot where the downlink resource re-assignment message will be transmitted.

It will be appreciated by the skilled person that modifications may be made to the above described embodiment without departing from the scope of the present invention. For example, in order to ensure that all MSs using the PDCHs to be de-allocated are made aware of the de-allocation, it may be appropriate to send the RLC/MAC de-allocation message two or more times in case certain MSs are temporarily outside the area covered by the BSS. Embodiments of the invention may also involve the transmission of the same RLC/MAC de-allocation message on two or more time slots. This may be necessary, for

example, when MSs are using multiple time slots within a TDMA frame for a single packet switched data transmission but are only listening for control messages on one of the time slots. With different MSs listening for control messages on different time slots, such
5 multiple transmission is required in order to notify all MSs using a physical channel of the de-allocation of that channel.

The the RLC/MAC de-allocation message may include some MS specific information which is identified by including a MS specific identifier in the message. This may be
10 necessary, for example, to allocate different resource reassignment channels (uplink and downlink) to different MSs.

Claims

1. A method of de-allocating one or more physical channels previously assigned for
5 packet switched transmission between a plurality of mobile stations (MS) and a base
station subsystem (BSS), the method comprising broadcasting from the BSS an
RLC/MAC control message having a message-type field identifying the message as a
channel de-allocation message, and a de-allocated channel field identifying the physical
10 channel(s) to be de-allocated, wherein said control message is received and acted on by
said plurality of MSs using said physical channel(s).
2. A method according to claim 1, wherein said RLC/MAC control message
comprises a field defining the number of radio blocks after which the identified physical
15 channel(s) must be de-allocated.
3. A method according to claim 1 or 2, wherein said RLC/MAC control message
contains a field identifying a carrier on which the MSs may transmit to the BSS a new
packet channel request.
- 20 4. A method according to claim 3, wherein said RLC/MAC control message contains
a field identifying the time slots where a PRACH is allocated and where the MSs may
transmit a random access request for data on the identified carrier.
5. A method according to any one of the preceding claims, wherein said RLC/MAC
25 control message is transmitted on the same carrier frequency as was used for said de-
allocated physical channel(s), thereby identifying the message to the MSs as relating to
physical channels on said carrier.
6. A method according to claim 5, wherein said RLC/MAC control message contains
30 a field defining the time slot on said same carrier in which the BSS will transmit an uplink
resource reassignment message to the MSs.
7. A method according to claim 5 or 6, wherein said RLC/MAC control message contains
35 a field defining the time slot on said same carrier in which the BSS will transmit a downlink
resource reassignment message to the MSs.

8. A method according to any one of the preceding claims, wherein said RLC/MAC control message contains a temporary flow identity field which conveys a temporary flow identity (TFI).

9. A method according to claim 8, wherein said TFI is stored in a memory of the MSs enabling the MSs to recognise the RLC/MAC control message as a broadcast message.

10. A method according to any one of claims 1 to 8, wherein the message-type field alerts each of the MSs to the fact that the message is a broadcast message to be acted upon by all MSs using the physical channel(s) identified in the de-allocated channel field.

11. Apparatus for de-allocating one or more physical channels previously assigned for packet switched transmission between a plurality of mobile stations (MS) and a base station subsystem (BSS), the apparatus comprising means for broadcasting from the BSS an RLC/MAC control message having a message-type field identifying the message as a channel de-allocation message, and a de-allocated channel field identifying the physical channel(s) to be de-allocated, wherein all of said MSs using said physical channel(s) are arranged to receive and act upon said control message.

12. A cellular telephone system comprising a BSS incorporating the apparatus of claim 11 and a plurality of MSs arranged to receive said broadcast RLC/MAC control message.

1/2

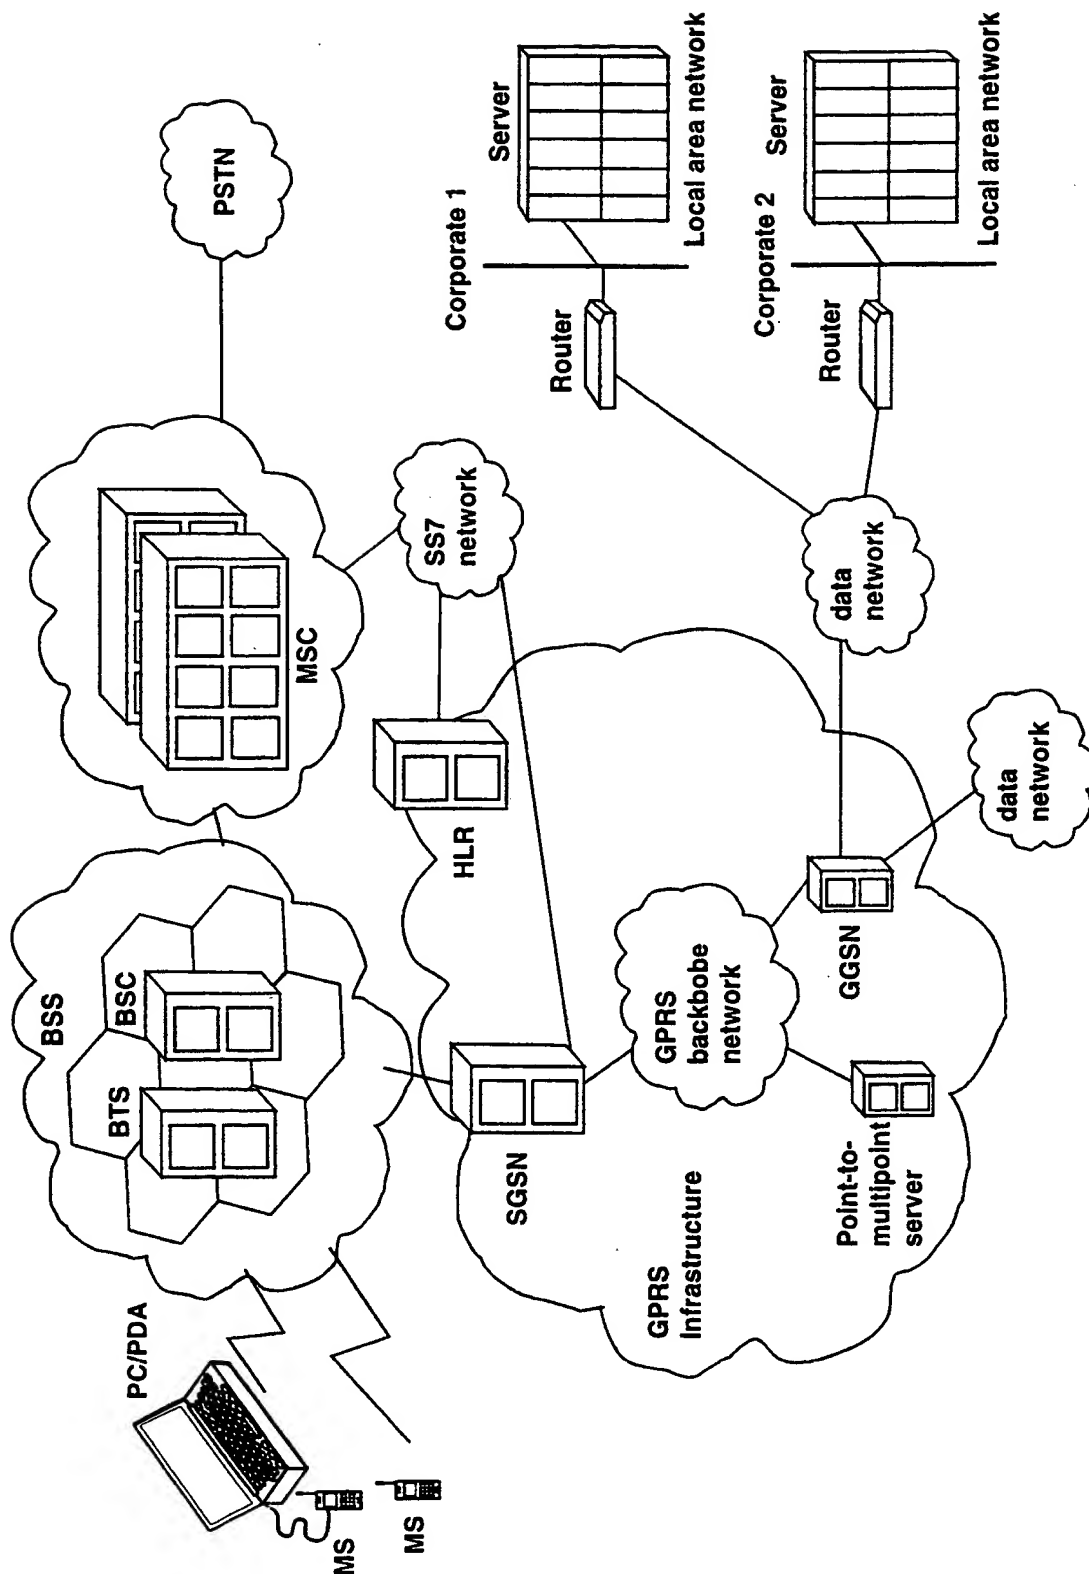


Figure 1

2/2

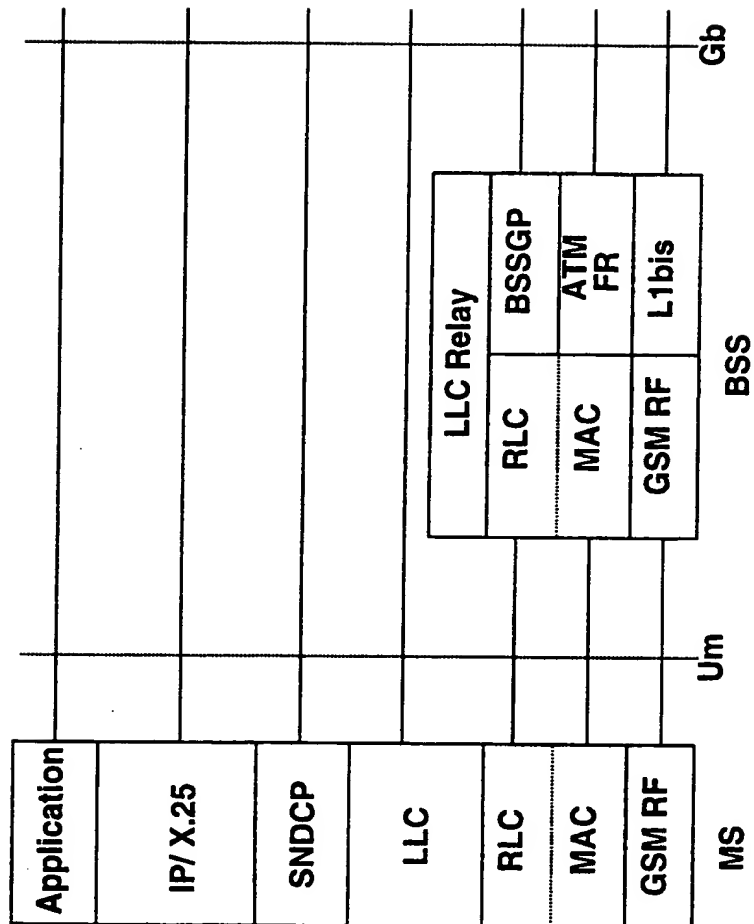


Figure 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00214

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/22, H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5396539 A (ARUNAS SLEKYS ET AL), 7 March 1995 (07.03.95), column 2, line 6 - line 23; column 2, line 55 - line 65; column 13, line 27 - column 15, line 3, column 14, line 32 - column 15, line 3 --	1,3-12
A	EP 0755164 A2 (NEC CORPORATION), 22 January 1997 (22.01.97), page 6, line 22 - page 13, line 10 --	1,11
X	WO 9622665 A1 (NOKIA MOBILE PHONES LTD.), 25 July 1996 (25.07.96), page 1, line 28 - line 34; page 2, line 12 - line 38; page 5, line 10 - line 24, abstract --	1,11

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 Sept. 1998

Date of mailing of the international search report

05 -10- 1998

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Göran Petersson

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00214

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0168927 A2 (STANDARD TELEPHONES AND CABLES PUBLIC LIMITED COMPANY), 22 January 1986 (22.01.86), page 4, line 6 - line 26; page 5, line 29 - line 33, abstract	1,11
A	<p style="text-align: center;">-- -----</p>	2-10,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/07/98

International application No.

PCT/FI 98/00214

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
US	5396539	A	07/03/95	US	5528664	A	18/06/96
				CA	2063901	A	26/09/92
EP	0755164	A2	22/01/97	AU	5468996	A	09/01/97
				JP	9018435	A	17/01/97
				US	5638371	A	10/06/97
WO	9622665	A1	25/07/96	AU	692036	B	28/05/98
				AU	4392796	A	07/08/96
				CN	1168216	A	17/12/97
				DE	19543845	A	11/07/96
				FI	2058	U	22/08/95
				FI	950097	A,V	10/07/96
				FR	2729269	A	12/07/96
				GB	2296844	A	10/07/96
				GB	9600378	D	00/00/00
				IT	1281596	B	20/02/98
				IT	MI960017	D	00/00/00
				NL	1002023	A	00/00/00
				SE	9600060	A	10/07/96
				US	5729534	A	17/03/98
EP	0168927	A2	22/01/86	GB	2162022	A,B	22/01/86
				JP	61035648	A	20/02/86
				US	4707826	A	17/11/87

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)